



## KODAK PROFESSIONAL 8657 Thermal Printer



### *Fast, Photo-Quality 5 x 7" Output*



- Stunning 5 x 7 continuous-tone photographic quality prints.
- Flexible and easy color-matching control.
- 50-second print speed.

The KODAK PROFESSIONAL 8657 Thermal Printer produces great-looking photo-realistic prints in a small 4 x 5-inch format in less than a minute. But since the actual maximum imaging area is 5 x 8 inches, you can also use it to produce two 4 x 5-inch prints at one time. This raster language model is ideal for making photo prints from applications such as ADOBE PHOTOSHOP, COREL PHOTOPAINT, MICROGRAFX PICTURE PUBLISHER, and any other imaging software that supports ADOBE PHOTOSHOP Plug-ins. The 8657 is great for applications in digital photography, retouching, event imaging, photographic studios, medical and scientific applications, and manufacturing inspection.


### *Features*

- Continuous-Tone Output, 24-Bit Color. Provides professional photo prints for the ultimate in output quality.
- Long-lasting, high-quality prints through the use of Kodak's patented thermal media and dyes.
- Interface Flexibility. Includes CENTRONICS PARALLEL, SCSI (2 ports) and APPLE TALK as standard ports. An optional 10/100 Mb Network Interface Card adds ETHER TALK, NOVELL NETWARE, NetBEUI, and TCP/IP network compatibility to enhance throughput and network productivity.
- API Toolkit available for developers for applications that require custom integration drivers.





# KODAK PROFESSIONAL 8657 Thermal Printer

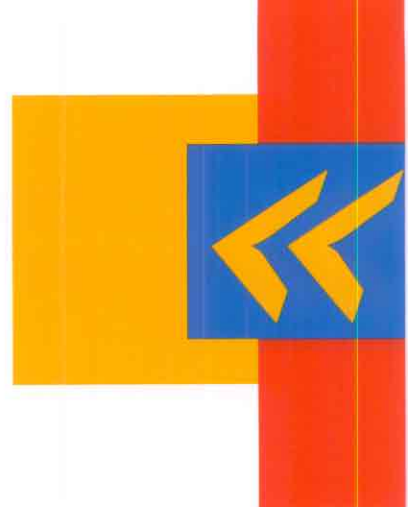

## Ordering Information

Products	CAT No.
KODAK PROFESSIONAL 8657 Thermal Printer	845 1288
KODAK PROFESSIONAL EKTATHERM Ribbon, Medium Format	837 0470
KODAK PROFESSIONAL 7 x 8.5" EKTATHERM Paper	834 5811
Optional KODAK PROFESSIONAL 10/100 Mb Network Interface Card	807 3033

## Printer Specifications

- Printing process: Thermal dye diffusion
- Processor: 33 MHz R3081 MIPS RISC processor
- Print resolution: 300 pixel-per-inch continuous-tone
- Print time: 50 seconds

## Computer Interface

- SCSI (2 ports), CENTRONICS, APPLE TALK
- Optional Network Interface Card supports TCP/IP, ETHER TALK, WIN 95 and NT Networks

## Printer Drivers and Fonts

- ADOBE PhotoShop export plug-ins for MACINTOSH, WINDOWS 95, and WINDOWS NT 4.0
- API Tool Kit available for developers

## Physical Characteristics/ Operating Requirements

- Physical dimensions: 16.6" W x 22.5" D x 12.0" H (422 mm x 571 mm x 305 mm)
- Weight: 56 lbs. (25.4 kg); 71 lbs. (32.2 kg) boxed
- Operating temperature: 59°F to 86°F (15°C to 30°C)
- Relative humidity: 20% to 76%
- Operating sound level: <57 dB
- Automatically adjusts to input voltage of 90 to 250 V AC, 47 to 60 Hz
- Power consumption: 250 watts maximum

## Agency Approvals

- UL 1950; CA 22.2 No. 950; TUV EN 60950

## EMI

- FCC Part 15; Subpart J; Class B; I CES-003, Class B; EN 500 81-1
- EN 500 82-1; VCCI, Class 2; CE Mark


Professional Marketing Services, Inc.  
4802 East Ray Road, Suite 2328  
Phoenix, Arizona 85044-6417  
P: 480-940-5400 F: 480-940-5488  
E-mail: [pmsi@promarketinc.com](mailto:pmsi@promarketinc.com)  
Web Site: [www.promarketinc.com](http://www.promarketinc.com)



Capture



Software



Storage



Output



© The Image Bank, 1993